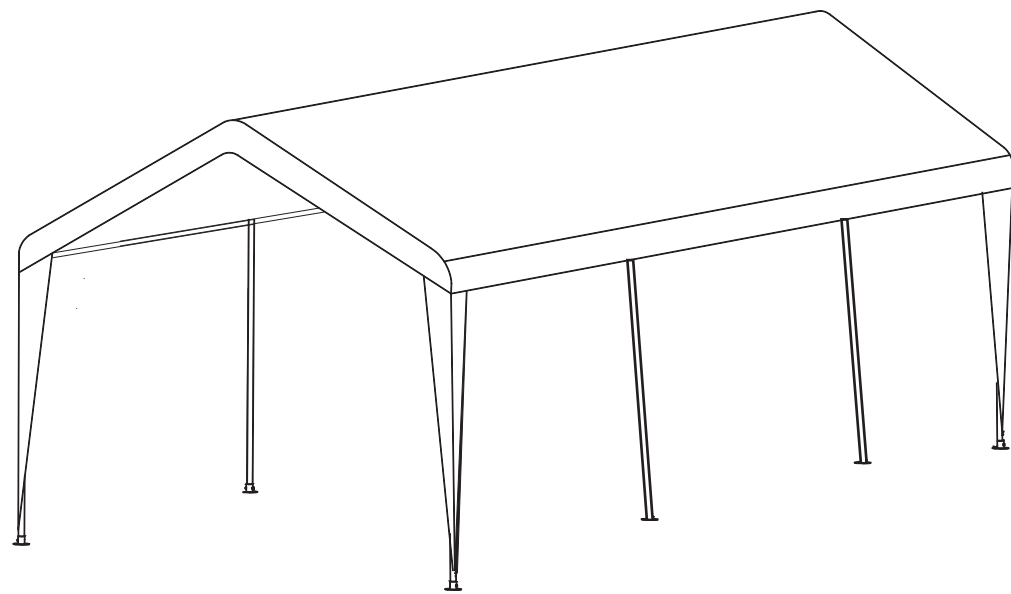


12 X 20 FT CARPORT



Thank You For Purchasing Carport

Please choose a suitable place before assembling the carport.
Please be sure to fix the carport to the ground by expansion bolt 4 or ground nail, 9 which is particularly important for the stability of the carport.
Please read the instruction manual carefully before assembling and using it.
Please carefully check whether the actual parts are completely consistent with the parts in the instructions, and ensure that all parts in the package are intact, which is related to the installation and after-sales service of the carport.

TOOLS RECOMMENDED

*NOTE: The recommended tools are not included in boxes and need to be prepared by yourself.



DRILL



RUBBER Mallet



STEPLADDER
(6.5Ft Or More)



SAFETY HAT



GLOVES



SAFETY GOGGLES



ATTENTIONS



Two or more people are required for assembly



To better align the screws for practical situations, do not fully tighten screws initially



Please reinforced the carport and do not use in heavy winds or inclement weather



Make sure all screws are tightened before use and check all screws, buckles and straps every 90 days











Since it is easy to lose many small accessories during the installation, please collect all the screw accessories before the assembly is completed




Please clear the snow off the roof in time for the heavy snowfall and do not use it


Parts List

①		②		9pcs
③		④		8pcs
⑤		⑥		6pcs
⑦		⑧		8pcs
⑨		⑩		44pcs
⑪		⑫		2pcs
⑬		⑭		1pc
		Ⓗ		1PC

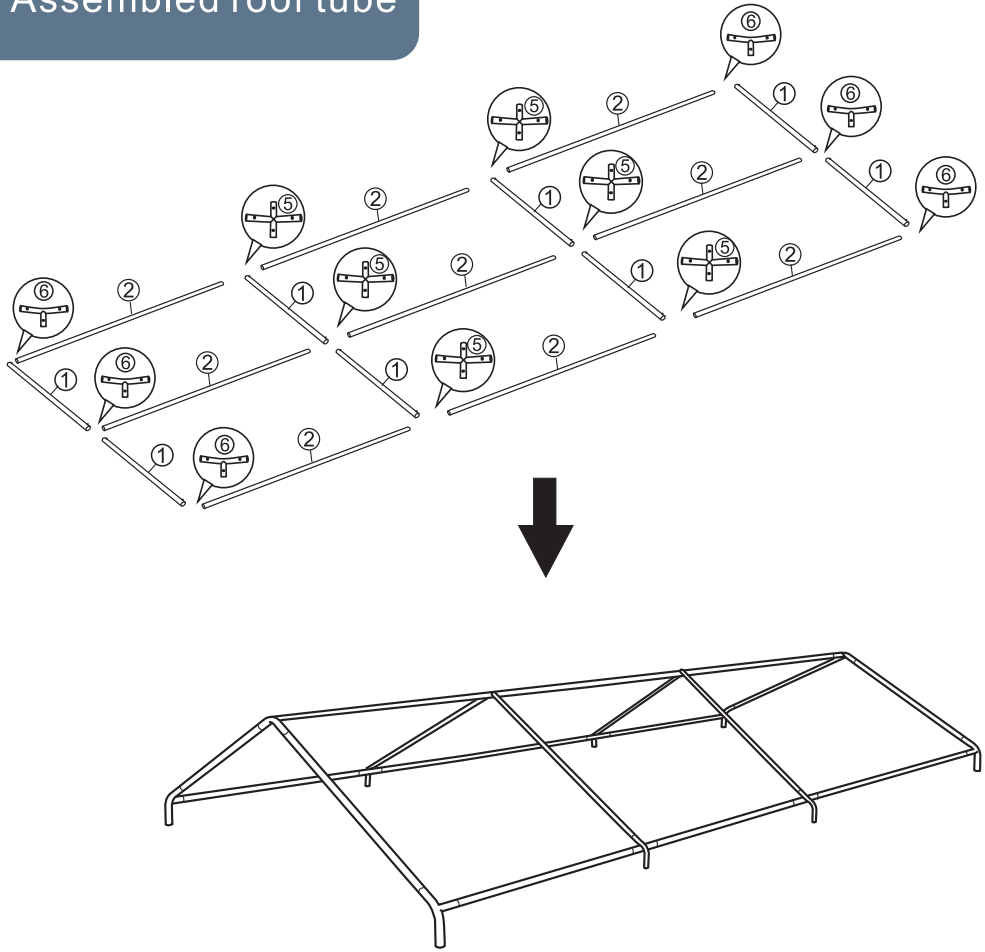
step 1: Assembled roof tube



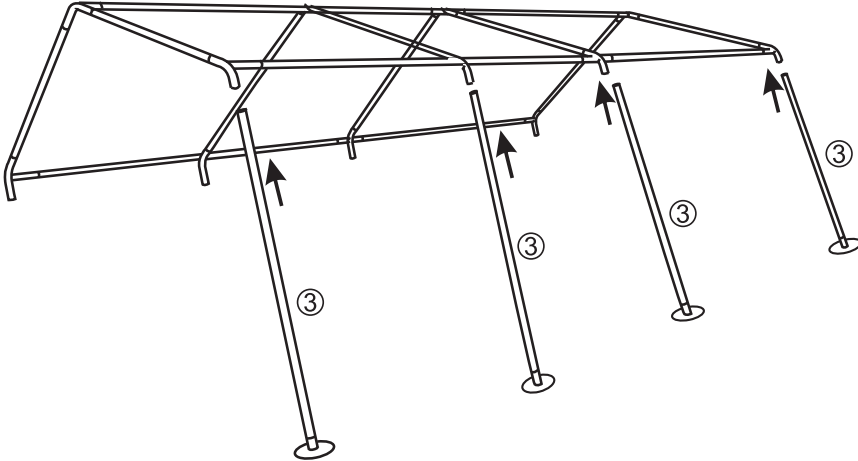
step 2: Assembled the leg tubes on either side



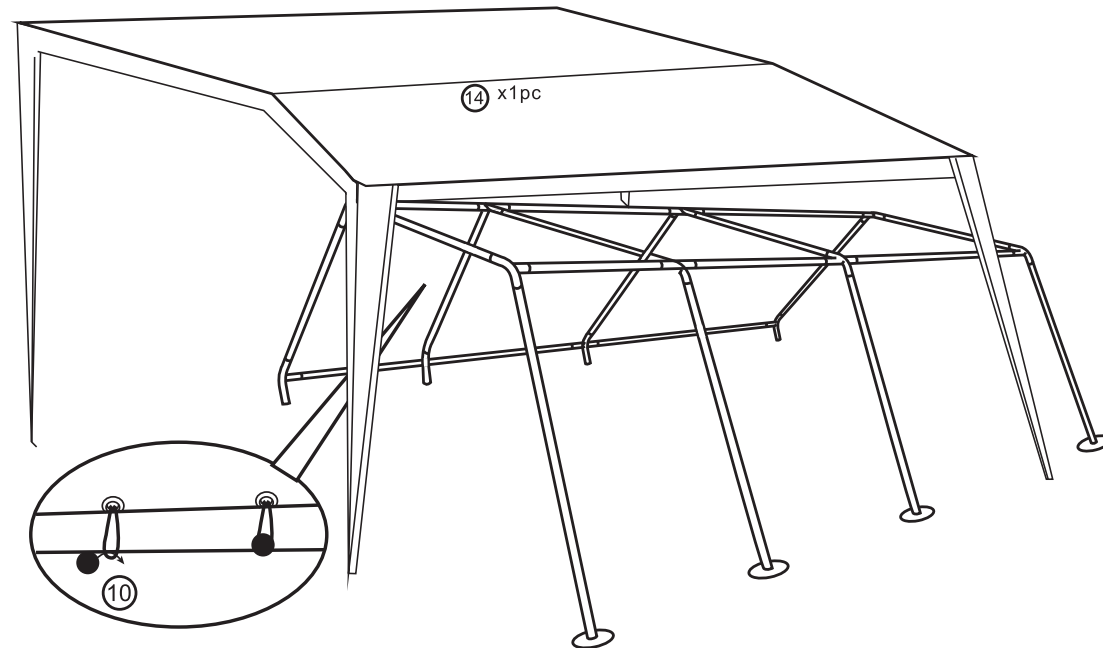step 3: Assembled the cover 14, Connect the roof to the frame with parts 10



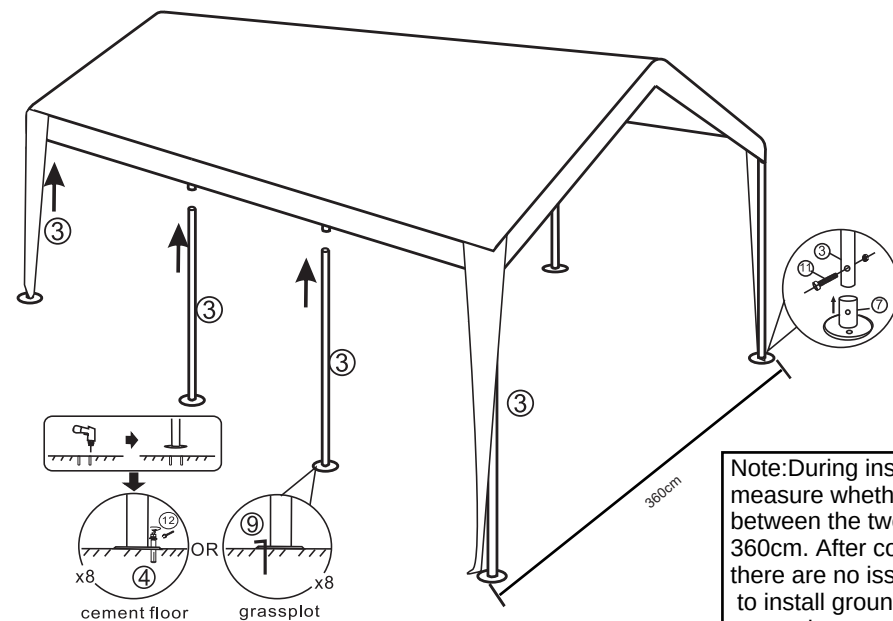
step 4: Assembled another side of the leg tubes



Note: During installation, please measure whether the distance between the two-foot bases is 360cm. After confirming that there are no issues, it is essential to install ground nails or expansion screws properly.

Please choose the reinforcement method according to the environment in which it is used. However, no matter which one you choose, reinforcement is necessary so that your items can be more stable.

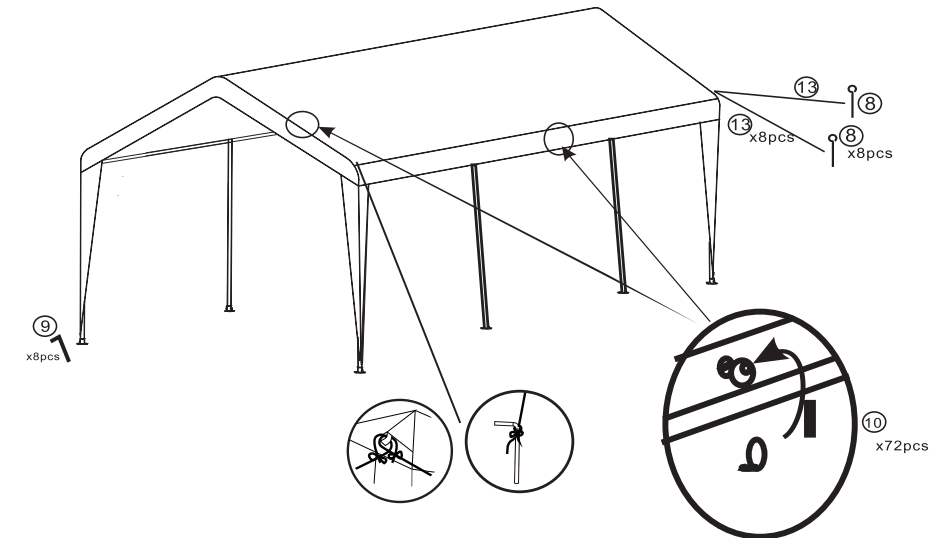step 5: fix them with parts 10, and fix the carport with ropes 13 and pegs 8



After opening the box, there is an additional complimentary repair adhesive tape (H) in the accessory package. Please keep it safe. If the tarpaulin is damaged due to special reasons, it can be temporarily repaired!